




THUNDER JET AC1902T / AC1904T



SUBLIMATION SERIES

INSPIRING INNOVATION

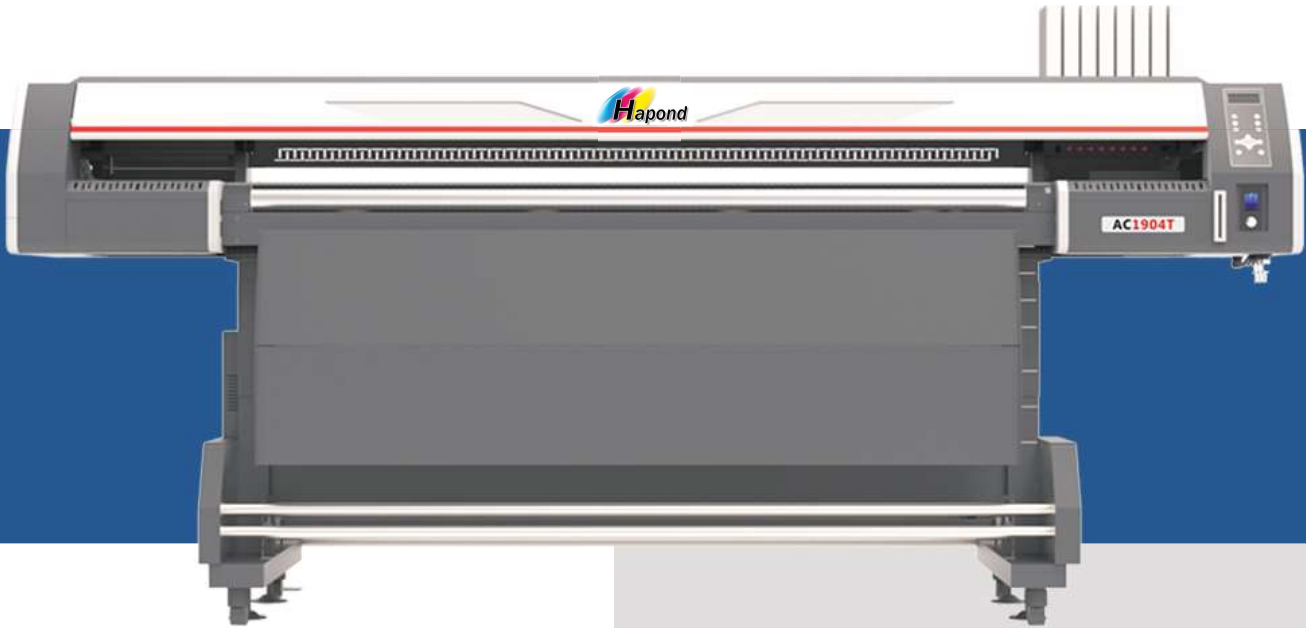

MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry

JAPAN
EPSON Print Head



SUBLIMATION SERIES

◀ **THUNDER JET**
AC1902T / AC1904T

THUNDER JET AC1902T / AC1904T

SUBLIMATION SERIES



TECHNICAL SPECIFICATIONS

Dimension 机器尺寸	3326mm(L/长) x 1173mm(W/宽) x 1639mm(H/高)		
Weight 机器重量	300kg / 公斤		
Max. Print Width 打印宽度	1900mm / 毫米		
Max. Media Width 材料宽度	1900mm / 毫米		
Ink Type 墨水类型	Sublimation Transfer Ink / 升华墨水		
Ink Color 墨水颜色	C M Y K		
Print Head 打印喷头	EPSON i3200 A1 (3.5pl)		
No. of Print Head 喷头数量	2 / 4units		
Print Resolution 打印精度	360x1200dpi, 360x1800dpi, 720x1200dpi, 720x1800dpi		
Printing Speed 印刷速度	Production Mode / 生产模式	75 m ² /h	145 m ² /h
	Quality Mode / 品质模式	54 m ² /h	100 m ² /h
	High Precision Mode / 高精度模式	43 m ² /h	80 m ² /h
Print Mode 打印模式	Uni- and Bi- Direction / 单向和双向		
Media Type 适用材料种类	Sublimation Paper / 升华纸		
RIP & Control Software 软件输出	GZ Printer Manager, PhotoPrint, Optional: Ergosoft		
Cleaning System 清洗系统	Anti-blocking, Auto Flush & Moisturizing Function 防堵闪喷功能, 自动清洗与保湿功能		
Drying System 烘干系统	Multi-stage Heaters & Steam Exhaust / 多区加热器和蒸汽排气		
Media Handling 材料处理系统	Auto Media Release / Take Up System / Max. Media Weight 150kg 自动收放卷材系统/可承受150公斤材料喷印		
Image Format 打印文件格式	BMP, TIFF, JPEG, EPS, PDF, etc.		
Color Management 颜色控制	ICC Profile / icc彩色特性文件		
Data Interface 数据传输	USB 2.0 / 3.0		
Input Voltage 输入电压	Single Phase, AC220V±10%(50/60Hz), 7A(Printer)+16.5A(Heaters)		
Working Environment 工作环境	Temperature / 温度 : 23°C~29°C Humidity / 湿度 : 50%~80% RH		

Technical specifications are subject to change without prior notice.



HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)



21, Jalan Bukit Permai Utama Tiga,
Taman Industri Bukit Permai, Cheras,
56100 Kuala Lumpur, Malaysia.

