



Hapond T2513GN

FLATBED

T2513GN

UV INKJET SERIES

BRILLIANT START



MAIN APPLICATION

Decoration Industry

Advertising Industry

Interior Design Industry

Packaging Industry

Exhibition Industry

Leather & Textile Industry

Auto
Height Detector



Superior Quality
UV LED System



High Quality
Cable Chain



JAPAN
RICOH G5 Print Head




UV INKJET SERIES

◆ Hapond T2513GN Flatbed

Hapond T2513GN Flatbed

UV INKJET SERIES

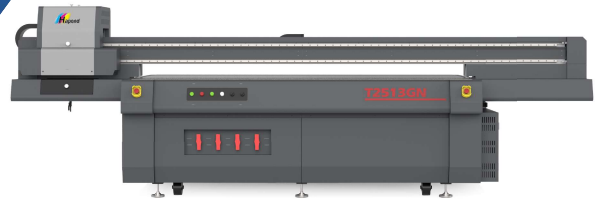

TECHNICAL SPECIFICATIONS

Dimension 机器尺寸	4452mm(L/长) x 2000mm(W/宽) x 1453mm(H/高)		
Weight 机器重量	1260kg / 公斤		
Print/Media Width 打印/材料宽度	2500mm(W/宽) x 1300mm(L/长)		
Media Thickness 材料厚度	Max. 100mm / 毫米		
Ink Type 墨水类型	UV Curable Ink /UV固化墨水		
Ink Color 墨水颜色	C M Y K W Optional: LC LM LV		
Print Head 打印喷头	RICOH G5 (7pl)		
No. of Print Head 喷头数量	Max. 8 units		
Print Resolution 打印精度	720x900dpi, 720x1200dpi		
Printing Speed 印刷速度	Production Mode/生产模式	2 Print Head 13 m ² /hr	4 Print Head 25 m ² /hr
	Quality Mode/品质模式	10 m ² /hr	20 m ² /hr
	High Precision Mode/高精度模式	8 m ² /hr	15 m ² /hr
Print Mode 打印模式	Uni- and Bi- Direction / 单向和双向		
Media Type 适用材料种类	Acrylic, Aluminium, Ceramic Tiles, Corrugated Board, Foam Board, Glass, Metal Plate, Back-lit, Banner Flex, Canvas, Mesh Paper, Synthetic Paper, Reflective Film, Sticker, Tarpaulin, Textile, Non-woven, Wallcoverings, etc. / 亚克力, 铝材, 瓷砖, 瓦楞板, 泡沫板, 玻璃, 金属板, 背光, 灯箱布, 油画布, 网格纸, 合成纸, 单透贴, 贴纸, 篷布, 纺织品, 无纺布, 壁纸等		
RIP & Control Software 软件输出	Hapond Printer Manager, PhotoPrint		
Curing System 固化系统	LED UV System		
Cleaning System 清洗系统	Positive Flush / 正压清洗		
Image Format 打印文件格式	BMP, TIFF, JPEG, EPS, PDF, etc.		
Color Management 颜色控制	ICC Profile / ICC色彩特性文件		
Data Interface 数据传输	USB 2.0/3.0		
Input Voltage 输入电压	220~240VAC (50/60Hz), 32A / 220~240伏交流 (50/60赫兹), 电流32安培		
Working Environment 工作环境	Temperature / 温度 : 20°C-28°C Humidity / 湿度 : 40%-70%RH		

Technical specifications are subject to change without prior notice.



HAPOND DIGITAL TECHNOLOGY SDN. BHD. (788546-V)

